



XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

### Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Laser shielding acrylic material
- Off-the-shelf sizes
- Used with class 3B and 4 lasers
- UV resistant

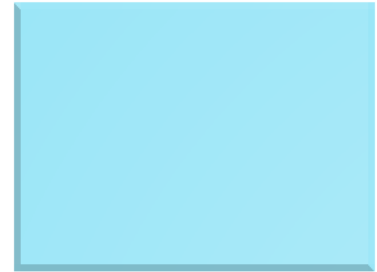

### ACR-2100 Laser Safety Window, Standard Sizes

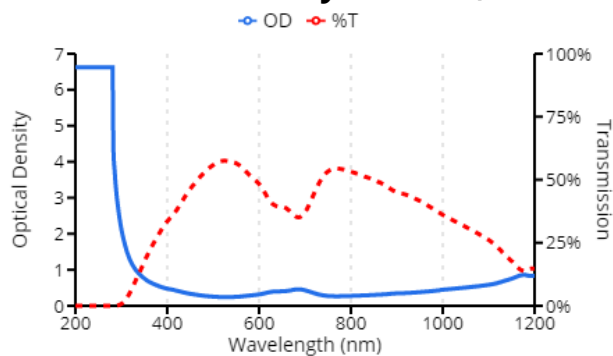


#### Protection

- OD 4+ @ 1900-2700nm
- OD 5+ @ 10600nm

#### Specifications and Operational Parameters

|                                   |                     |
|-----------------------------------|---------------------|
| Filter Color, Filter Material     | blue, acrylic       |
| Transmission                      | VLT 57              |
| Thickness (± 0.015 inch (0.4 mm)) | 0.125 inch (3.2 mm) |
| Certifications                    | ANSI Z136           |

### 2100 CIE Colorimetry

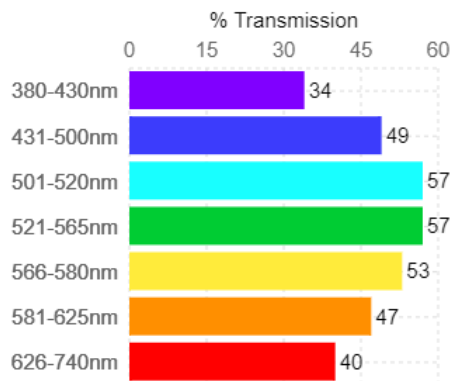

Laser Viewing Window for CO<sub>2</sub> (10600 nm), Far Infrared (2000+ nm)  
 Available in custom and standard stock sizes.

**LINK:** <https://www.kenteklaserstore.com/acr-2100-laser-safety-window-standard-sizes>