


XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

### Features and Applications

- Common choice for laser cutting and engraving equipment
- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Ideal for integrating directly into laser equipment
- Protects from direct and scattered laser light
- Used with class 3B and 4 lasers



### ACR-AQ6000 Laser Safety Window

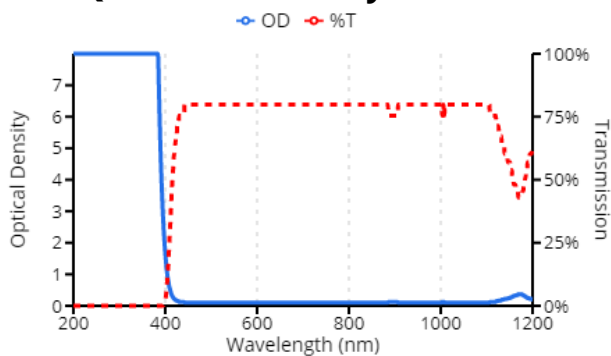

### Protection


- OD 5+ @ 190-375nm
- OD 6+ @ 10600nm

### Specifications and Operational Parameters

|                                   |                    |
|-----------------------------------|--------------------|
| Filter Color, Filter Material     | clear, polymer     |
| Transmission                      | VLT 90             |
| Thickness (± 0.015 inch (0.4 mm)) | 0.22 inch (5.6 mm) |
| Certifications                    | ANSI Z136          |

Ships from Stock

### AQ6000 CIE Colorimetry

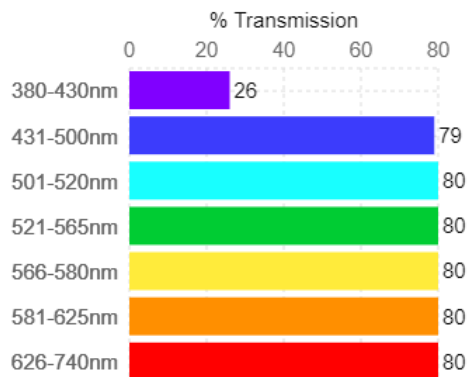

Laser Viewing Window for CO<sub>2</sub> (10600 nm)  
 Available in custom and standard stock sizes.

**LINK:** <https://www.kenteklaserstore.com/acr-aq6000-laser-safety-window>