



XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Ideal for common manufacturing lasers
- Ideal for integrating directly into laser equipment
- Laser shielding acrylic material
- Protects from direct and scattered laser light

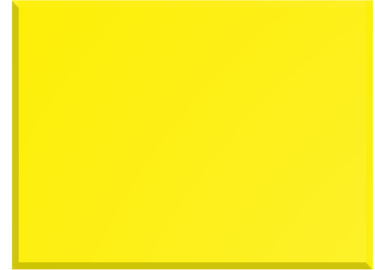

ACRX-EXC2 Laser Safety Window

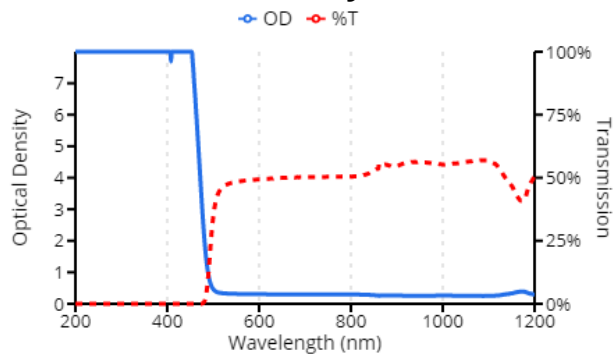


Protection

- OD 4+ @ 190-400nm
- OD 5+ @ 10600nm

Specifications and Operational Parameters

Filter Color, Filter Material	yellow, acrylic
Transmission	VLT 84
Thickness (± 0.015 inch (0.4 mm))	0.125 inch (3.2 mm)
Certifications	ANSI Z136

EXC2 CIE Colorimetry

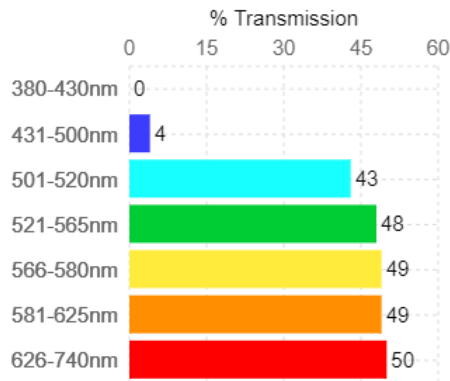

Laser Viewing Window for CO₂ (10600 nm), Excimer (300-400 nm)
 Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/acrx-exc2-laser-safety-window>