



XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Laser shielding acrylic material
- Off-the-shelf sizes
- Used with class 3B and 4 lasers
- UV resistant

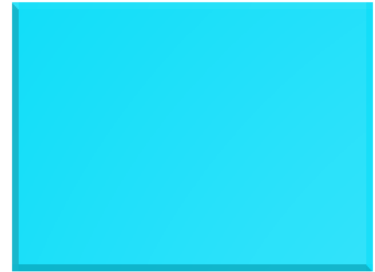

ACR-RUB Laser Safety Window

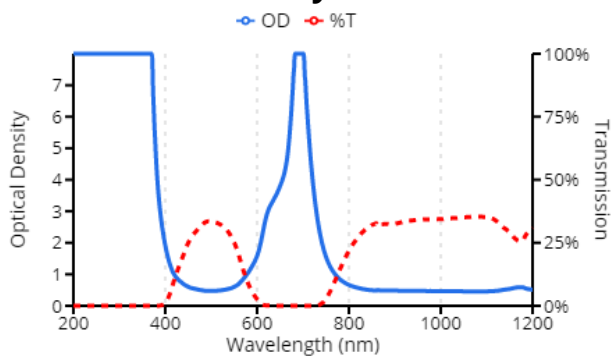

Protection


- OD 5+ @ 190-375nm
- OD 2+ @ 630-730nm
- OD 3+ @ 650-720nm
- OD 5+ @ 670-710nm
- OD 6+ @ 694nm
- OD 5+ @ 10600 nm

Specifications and Operational Parameters

Filter Color, Filter Material	blue, acrylic
Transmission	VLT 45
Thickness (± 0.015 inch (0.4 mm))	0.15 inch (3.8 mm)
Certifications	ANSI Z136

In Stock: Ships in 2 days

RUB CIE Colorimetry

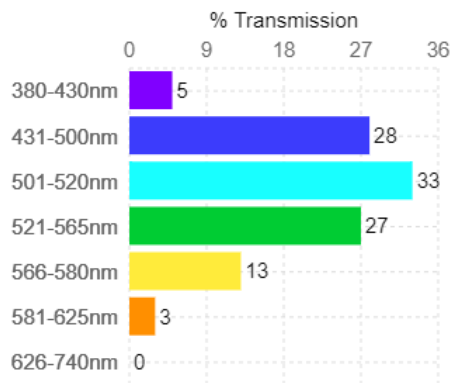

Laser Viewing Window for CO₂ (10600 nm), Ruby (694 nm)
 Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/acr-rub-laser-safety-window>