


XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Laser shielding acrylic material
- Off-the-shelf sizes
- Used with class 3B and 4 lasers
- UV resistant




ACR-610-694 Laser Safety Window

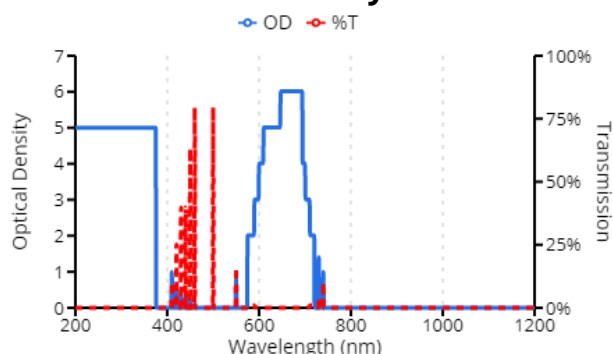

Protection

- OD 5+ @ 190-375nm
- OD 2+ @ 575-720nm
- OD 3+ @ 590-710nm
- OD 4+ @ 600-700nm
- OD 5+ @ 610-694nm
- OD 6+ @ 647- 694nm
- OD 5+ @ 10600nm

610-694 CIE Colorimetry

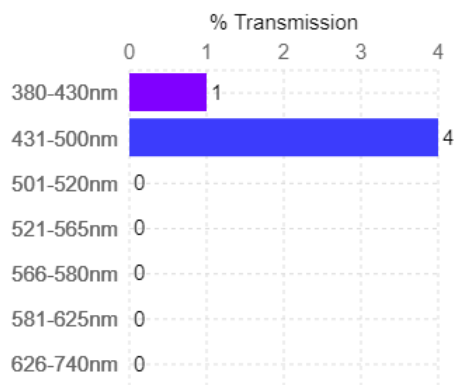

Laser Viewing Window for CO₂ (10600 nm), Dye (595 nm), Ruby (694 nm)
 Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/acr-610-694-laser-safety-window>

Specifications and Operational Parameters

Filter Color, Filter Material	blue, acrylic
Transmission	VLT 22
Thickness (± 0.015 inch (0.4 mm))	0.15 inch (3.8 mm)
Certifications	ANSI Z136

In Stock: Ships in 2 days