


XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Ideal for common manufacturing lasers
- Ideal for integrating directly into laser equipment
- Laser shielding acrylic material
- Protects from direct and scattered laser light




ACRX-MW Laser Safety Window

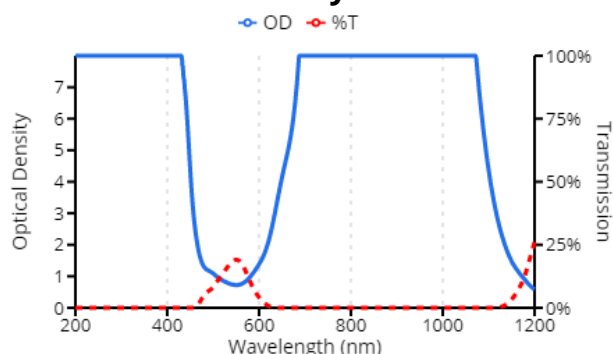

Protection

- OD 6+ @ 200-410nm
- OD 2+ @ 640-1106nm
- OD 4+ @ 680-1080nm
- OD 6+ @ 692-1064nm
- OD 5+ @ 10600nm

MW CIE Colorimetry

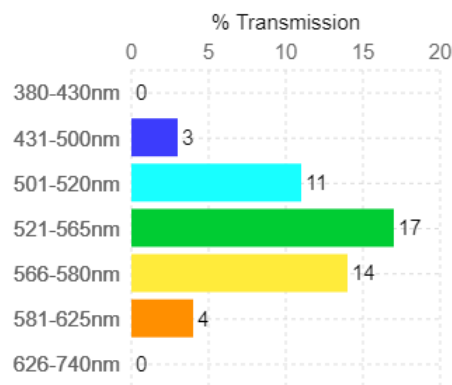

Laser Viewing Window for Alexandrite (755 nm), CO₂ (10600 nm), Diode (800 nm), Excimer (300-400 nm), Fiber (1070-1080 nm), Nd:YAG (1064 nm), Ruby (694 nm)

Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/acrx-mw-laser-safety-window>

Specifications and Operational Parameters

Filter Color, Filter Material	green, acrylic
Transmission	VLT 25
Thickness (± 0.015 inch (0.4 mm))	0.125 inch (3.2 mm)
Certifications	ANSI Z136

In Stock: Ships in 2 days