


XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Near IR VIS and IR blocking
- Non-viewing shield
- Off-the-shelf sizes
- Opaque
- UV resistant



ACRK-BBKQ Laser Safety Window

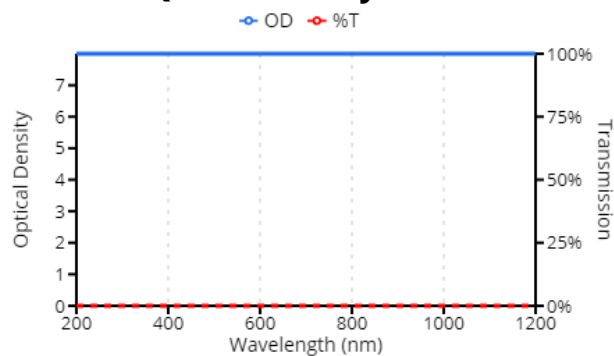

Protection

Blackout Material for UV, Visible and IR. < .01% T 200nm-11100nm.

Specifications and Operational Parameters

Filter Color, Filter Material	black opaque, polymer
Transmission	VLT 0
Thickness (± 0.015 inch (0.4 mm))	0.236 inch (6 mm)
Certifications	ANSI Z136

BBKQ CIE Colorimetry

	% Transmission				
	0	1	2	3	4
380-430nm	0				
431-500nm	0				
501-520nm	0				
521-565nm	0				
566-580nm	0				
581-625nm	0				
626-740nm	0				

Laser Viewing Window for Blackout
 Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/acrk-bbkq-laser-safety-window>