


XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Ideal for common manufacturing lasers
- Ideal for integrating directly into laser equipment
- Laser shielding acrylic material
- Protects from direct and scattered laser light



ACRX-KTP Laser Safety Window

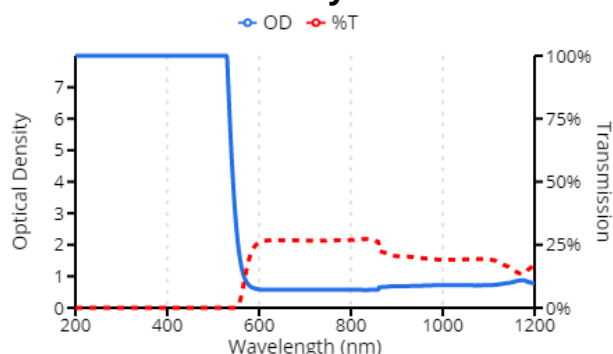

Protection


- OD 6+ @ 200-360nm
- OD 4+ @ 360-535nm
- OD 6+ @ 532nm
- OD 5+ @ 10600nm

Specifications and Operational Parameters

Filter Color, Filter Material	orange, acrylic
Transmission	VLT 32
Thickness (± 0.015 inch (0.4 mm))	0.125 inch (3.2 mm)
Certifications	ANSI Z136

In Stock: Ships in 2 days

KTP CIE Colorimetry

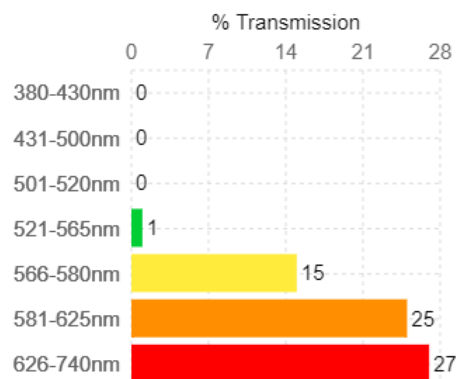

Laser Viewing Window for CO₂ (10600 nm), Excimer (300-400 nm), KTP (532 nm)
 Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/catalog/product/view/id/3089/s/acrx-ktp-laser-safety-window/>