


XVT™ Enhanced Visible Technology is a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

Fiber welding
 flash
 and laser protection
 Shade 3



ACR-A51W3 Laser Welding Safety Window

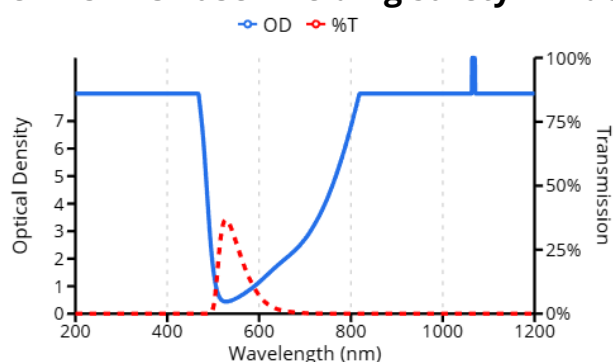


Protection

OD 4+ @ 200-400nm
 OD 7+ @ 820-1800nm
 OD 5+ @ 9000-11100nm
 U10L3R5KTKZ87 W3
 ISO 16321-2 KTK W3
 1070nm | 3000 kW/m² | T2 | t_{max} = 100 seconds KTK CE 60825
 1070nm | 1000 kW/m² | T3 | t_{max} = 15 seconds KTK CE 60825

D AB4 KTK 1070 CE 12254

A51W3 CIE Colorimetry

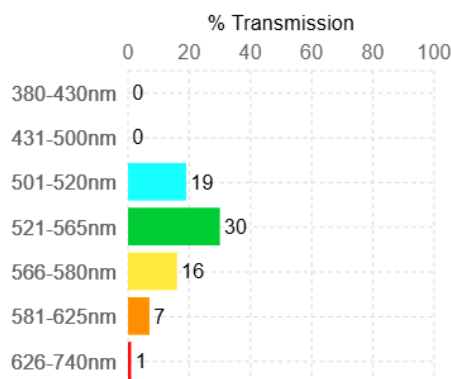

Specifications and Operational Parameters	
Filter Color, Filter Material	green, acrylic
Transmission	VLT 15
Thickness (± 0.015 inch (0.4 mm))	0.125 inch (3.2 mm)
Certifications	ANSI Z136 ANSI Z87 CE EN 12254 CE EN 60825-4 ISO 16321-2 UKCA

In Stock: Ships in 3 days

Laser Viewing Window for Fiber Welding (1070 nm)

LINK: <https://www.kenteklaserstore.com/acr-a51w3-laser-welding-safety-window>