


XVT™ Enhanced Visible Technology a formulation of UV and quintessential absorbing dyes cast in an acrylic base resulting in premium laser safety windows.

Features and Applications

- Commonly used in enclosures to reduce laser from class 4 to class 1
- Customizable for doors windows and enclosures
- Laser shielding acrylic material
- Off-the-shelf sizes
- Used with class 3B and 4 lasers
- UV resistant




ACR-694-1065 Laser Safety Window

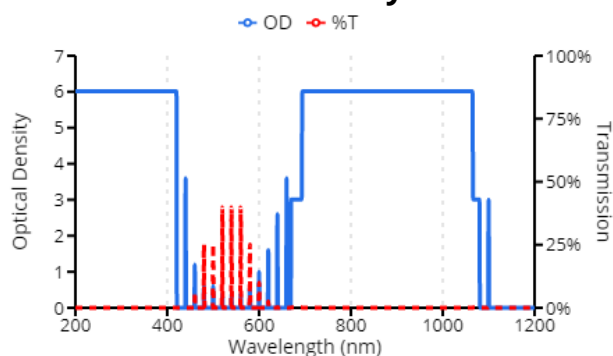

Protection

- OD 6+ @ 190-420nm
- OD 3+ @ 670-680nm
- OD 3+ @ 680-1080nm
- OD 6+ @ 694-1065nm
- OD 3+ @ 2750-3000nm

694-1065 CIE Colorimetry

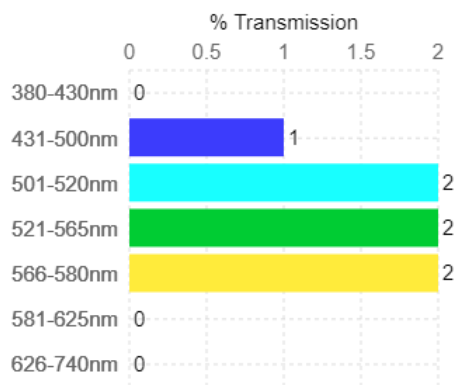

Laser Viewing Window for Excimer (300-400 nm), Nd:YAG (1064 nm), Ruby (694 nm)
 Available in custom and standard stock sizes.

LINK: <https://www.kenteklaserstore.com/acr-694-1065-laser-safety-window>

Specifications and Operational Parameters

Filter Color, Filter Material	green, acrylic
Transmission	VLT 24
Thickness (± 0.015 inch (0.4 mm))	0.15 inch (3.8 mm)
Certifications	ANSI Z136

In Stock: Ships in 2 days